


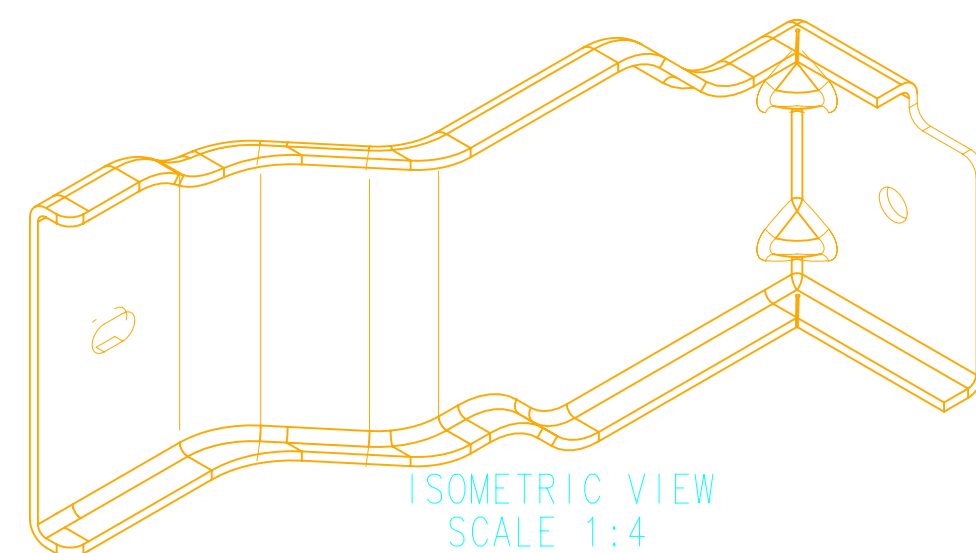

<u>UNSPECIFIED TOLERANCES:</u>		
1. FORMING TO FORMING		
	<500	± 0.5
	>500	± 0.8
2. CD BETWEEN HOLES		
	IN ONE PLANE	± 0.2
	IN DIFF PLANES	± 0.5
3. FORM TO PIERCE		± 0.5
4. ANGULAR TOLERANCE		$\pm 1^\circ$
5. HOLE SIZES		$\pm 0.2/-0$
6. SLOT SIZES		± 0.8
7. GENERAL TOLERANCE		
	UP TO 300	± 0.8
	ABOVE 300	± 1.0
8. FLANGE WIDTH		$+1.0/-0.7$
9. JOGGLE DEPTH		$+0.3/0$

ER14C0002710	AB1	PRODUCTION RELEASE				OVK	OVK	RNM	01/07/14
	AB	DIM 247 MADE REF., DIM 119+/-1 WAS 119							
ECN12P014799	AA	PART MODIFIED AND REDRAWN				OVK	OVK	RNM	30/11/12
E.R.NO.	LET	LOC	REVISIONS			DSNR	CKR	APPR.	DATE

<SC> :SIGNIFICANT CHARACTERISTICS										▽:CRITICAL CHARACTERISTICS									
BREAK SHARP CORNERS MAY BE EITHER A CHAMFER OR A RADIUS FROM 0.2 mm MIN. TO 1.0 mm MAX.										MAHINDRA & MAHINDRA LIMITED TRACTOR DIVISION KANDIVLI(EAST), MUMBAI 400 101, INDIA.									
UNSPECIFIED TOLERANCES AS PER ISO-2768-1:1989										E.R. / PROC.REQ.NO : ER14C0002710									
DIMENSIONS										PART NO. : 007543910C1									
LINEAR IN mm.										PART NAME : FLOOR FRONT MTG BKT LH									
f FINE (X.XXX)										v VERY COARSE (X)									
m MEDIUM (X.XX)										u UNFINISHED									
c COARSE (X.X)										v VERY COARSE (X)									
v VERY COARSE (X)										v VERY COARSE (X)									
ANGULAR IN deg.										HEAT TREATMENT : -----									
OVER UPTO										2012									
f FINE (X.XXX)										NAME SIGN									
m MEDIUM (X.XX)										DATE									
c COARSE (X.X)										FIRST USED TRCR. MODEL									
v VERY COARSE (X)										M-STAR									
v VERY COARSE (X)										SCALE 1:2									
v VERY COARSE (X)										DESIGNER O V K									
v VERY COARSE (X)										CHECKER O V K									
v VERY COARSE (X)										APPR. BY R N M									
v VERY COARSE (X)										SHEET 1 OF 1									
v VERY COARSE (X)										UNIT QTY. : 1/TR									
v VERY COARSE (X)										WEIGHT : 0.910 kg.									
v VERY COARSE (X)										ALL DIMENSIONS ARE IN mm.									
v VERY COARSE (X)										CHECK DRG WITH LATEST CHANGE No -									